

Downspout Debris Filter

Instructions for wall mount model.




Determine desired installation height of your debris box, next cut downspout length so it enters the top of the debris box at least 1”.



Hardware included with barrel mount model;
1- downspout strap
4- 1/2” self-taping screws
3- 1 1/2” screws for downspout strap & box mounting.

Securing Downspout; Center downspout strap 1 to 4” above desired height of debris filter and secure with 1- 1 1/2” screw then wrap strap to downspout sides and secure with 2- 1/2” long zip screws.

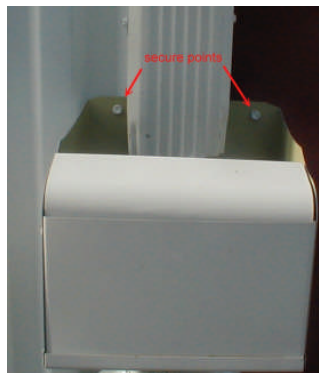

A. To secure filter to building use the 2- 1 1/2” self-taping screws (provide) as shown in above picture.

B. Slide the bottom downspout section of the over the outlet sleeve on the bottom of the debris box and secure with 2 - 1/2” screws.

Rain Barrel Mount Instructions



To secure downspout see instructions on page 1



The holes required in your barrel are 2 3/4" (for 2x3 downspout) or 3 3/8" (for 3x4 downspout) in Diameter. A silicone sealant can be applied between the filter and the barrel if desired.

Filter box can be secured to your rain barrel with 2 L shaped brackets provided (one on each side).



Hardware included with barrel mount model;

- 2- L brackets
- 1- downspout strap
- 8- 1/2" self-taping screws
- 1- 1 1/2" downspout strap screw.